


**JUMBO CR BEARINGS**

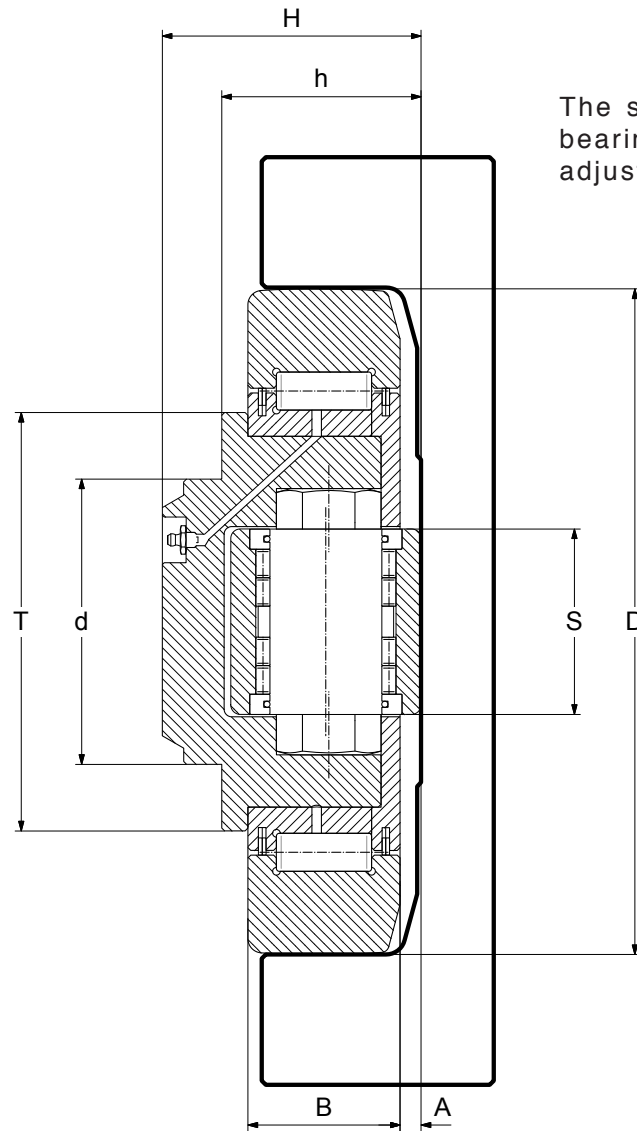

The side rollers on Jumbo bearings are eccentrically adjustable

**FC = C Section**  
**FM = I Section**

BEARING REFERENCE	Dimensions (mm)					B	A	S	r	Radial	Radial	Axial	Axial	PROFILE REF C / I SECTION
	D	T	d	H	h					C (kN)	C <sub>0</sub> (kN)	C (kN)	C <sub>0</sub> (kN)	
4.089	165	113	80	69	53 - 56	40	5	50	3	213	388	85	133	FC165 / FM165
								40				46	79	
4.090	190	124	100	84.5	64.5 - 67.5	48	6.5	60	4	266	500	100	180	FC190 / FM190
								40				46	79	
4.091	220	146	110	94.5	74.5 - 77.5	58	6.5	75	5	326	681	138	257	FC220 / FM220
								60				101	173	
4.092	250	168	120	102	77 - 80	60	7	75	5	369	748	138	257	FC250 / FM250
								60				101	173	
4.093	280	188	150	119.5	89.5 - 93.5	72	7.5	90	5	489	1066	182	488	FC280 / FM280
								60				101	173	
4.094	320	218	140	135	110 - 114	85	10	90	8	642	1370	210	422	Profile made to order
4.095	340	240	140	150	120 - 124	89	10	100	8	735	1600	232	463	Profile made to order
4.096	390	242	170	200	150 - 154	118	10	100	8	1050	2243	232	463	Profile made to order

C = Dynamic Load Capacity  
C<sub>0</sub> = Static Load Capacity