



VULKOLLAN BEARINGS

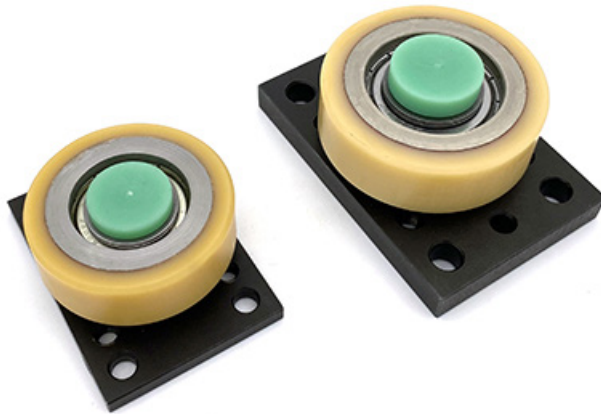


The Vulkollan coated bearings are available in two sizes - 52.5mm ϕ and 62.5mm ϕ . They are designed to be used with the standard channels.


The complete assembly includes the bearing, the hub, an Oilamid rubbing block & the mounting plate. The Oilamid block helps the system run true and can be adjusted via a screw.

V.053+PLV53 - for use with EC053 rail

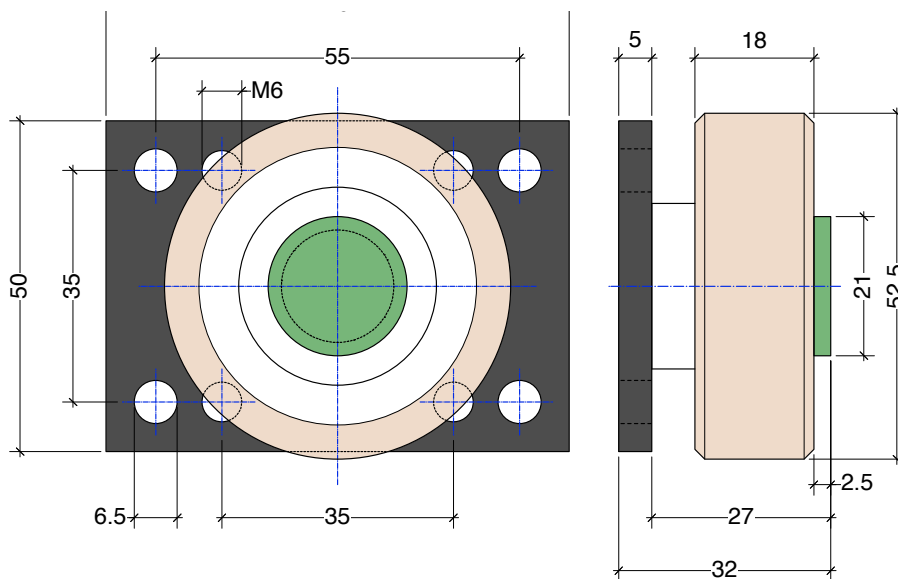

V.054+PLV54 - for use with 2890 rail

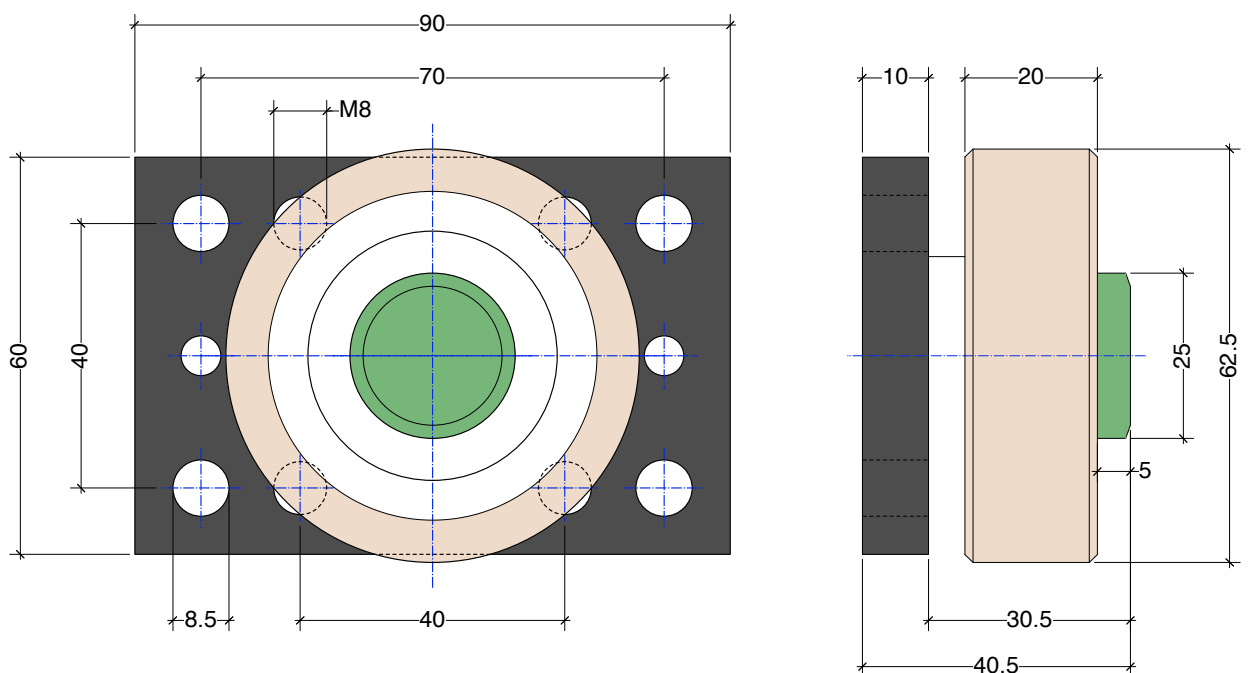

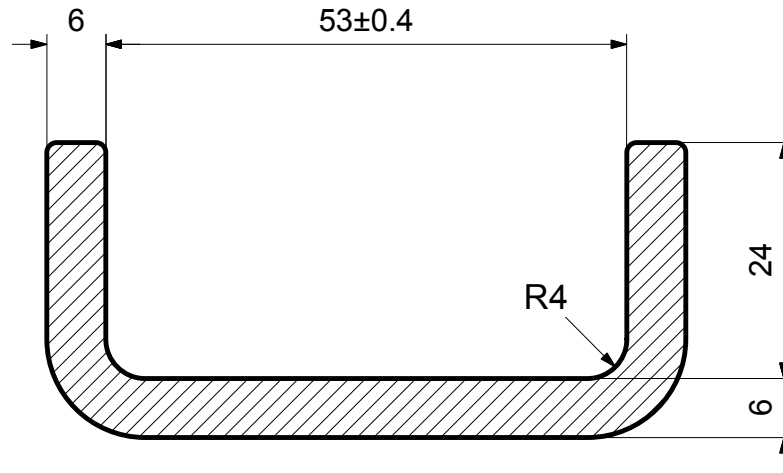STANDARD CHANNEL**EC053**

Profile Reference	Web Height mm	Flange Width mm	Channel Height mm	Weight kg / metre	Bearing Reference	Plate Reference	Section Shape
EC053	65	30	53	5.2	4.053	PLATE 00	C Section

PROFILE REFERENCE: **EC053**

Weight: 5.2kg per metre

Moment of Area (Wx): 11.6cm³

Material: S355J0 (cold rolled)

Use with our:

4.053 Standard Combined Roller Bearing

Other suitable bearings:

MRS 900 Channel Ball Bearing